

Air Cooled Condenser




Features

- To condense and cool down cooking vapours from both “Batch” and “Continuous” cooking process
- Unit capacity upto 9000 kg/hr
- Very rigid construction where all material in contact with the vapours and condensate are stainless steel
- Easy removable cover plates on the headers for quick and simple inspection and cleaning of the inside of the condensers
- Tubes manufactured in stainless steel with aluminium cooling fans
- Fan housings made out of galvanized steel
- Standard supplied with galvanized steel support frame, walkway and cage ladder



MAVITEC

Air Cooled Condenser

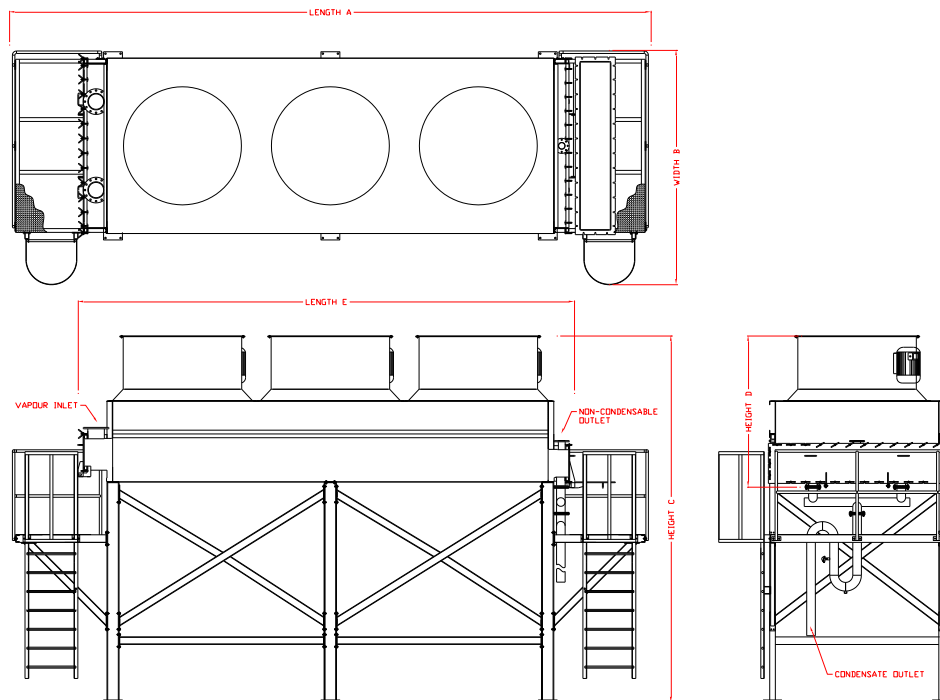

Specifications

Model	Capacity kg/hr	Power kW	No. of fans	Length (A) mm	Width (B) mm	Height (C) mm
50	1800	22	2	8500	3100	4900
85	2800	22	2	8500	3100	4900
170	3500	33	3	8500	3100	4900
225	5000	44	4	10500	3100	4900
7500	7500	44	2	10500	4000	5800
9000	9000	66	3	12500	4000	5800

Due to ongoing product improvements, data shown here is subject to change without notice.
Contact Mavitec B.V. for latest specifications.

MAVITEC

Galileistraat 20, 1704 SE Heerhugowaard, The Netherlands
Tel.: +31-72-574 59 88 - Fax: +31-72-574 55 48
E-mail: info@mavitec.com - www.mavitec.com