


# Lamella Pump

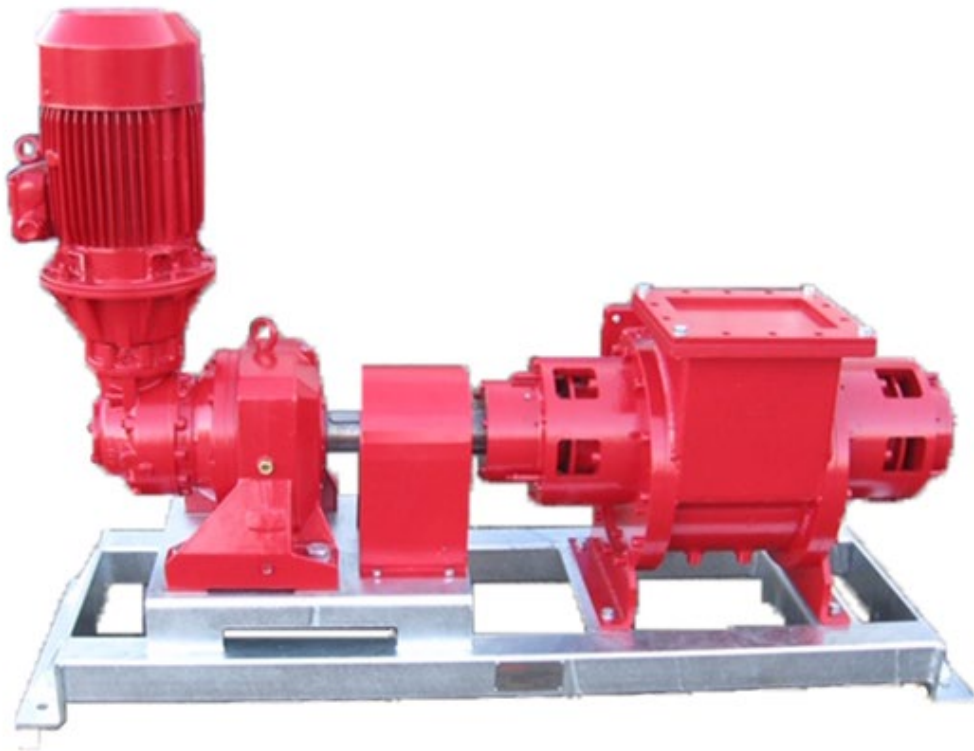

**Function:** Pumping broken raw material in to the process

**Features:**


- Interchangeable knives in the inlet and outlet side
- Trasco 90 coupling
- Parts manufactured in hardox 500
- Oil grease lubricated mechanical shaft seals
- 1 set of mating flanges in the pump inlet and outlet
- Parts manufactured in mild steel are delivered sand blasted and epoxy painted.
- Parts manufactured in stainless steel are sand blasted

**Capacity:** Up to 50m<sup>3</sup>/hr

*Mavitec strongly recommends the use of a frequency converter.*

**MAVITEC**

# Lamella Pump

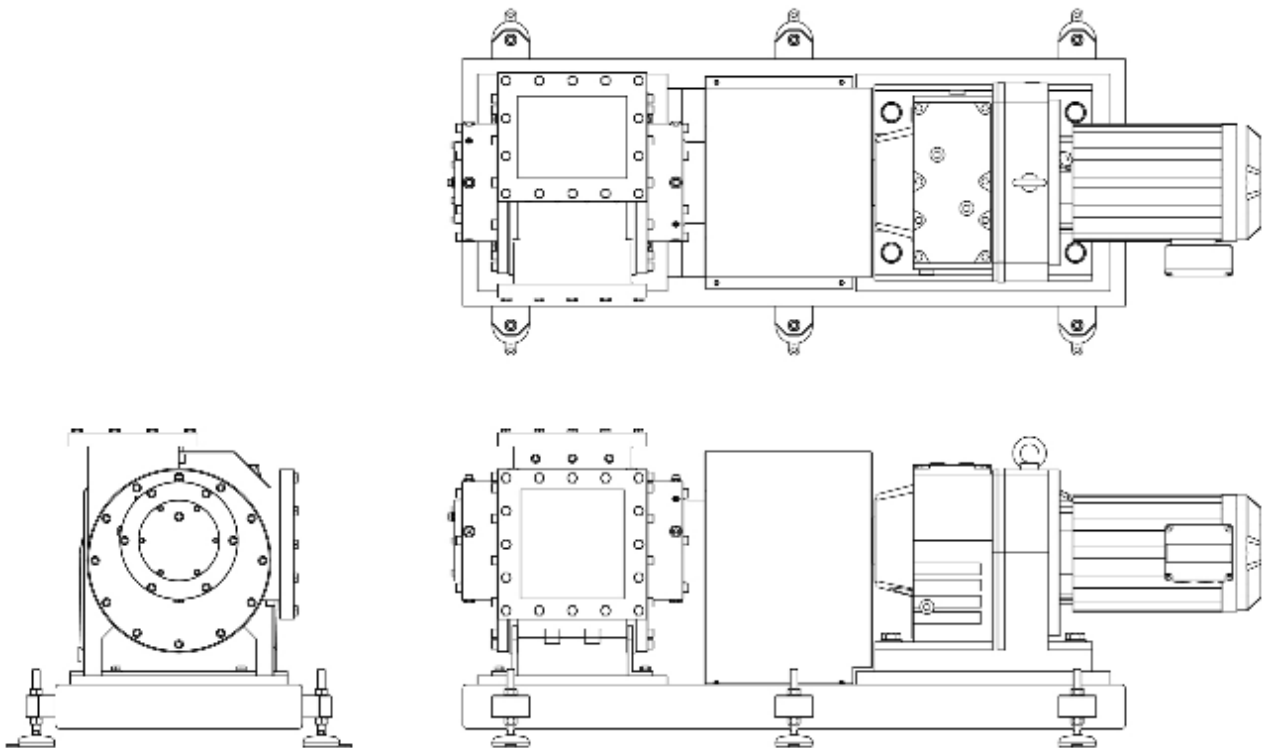

Model	Length (mm)	Total height (mm)	Centre height (mm)
250/70	670	500	304
350/90	860	640	367

Due to ongoing product improvements, data shown here is subject to change without notice.  
Contact Mavitec B.V. for latest specifications.

# MAVITEC

Galileistraat 32, 1704 SE Heerhugowaard, The Netherlands  
Tel.: +31 (0)72 574 59 88 - [info@mavitec.com](mailto:info@mavitec.com) - [www.mavitec.com](http://www.mavitec.com)

**Maximize the value of your by-products!**