


Lamella Pump

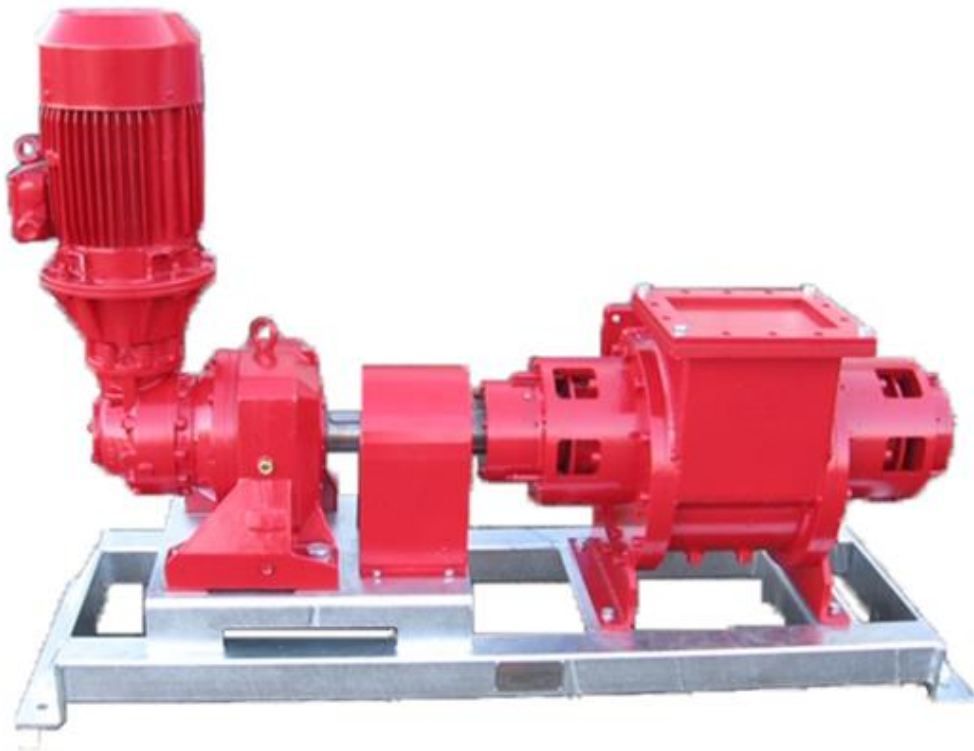

Function: Pumping broken raw material in to the process

Features:


- Interchangeable knives in the inlet and outlet side
- Trasco 90 coupling
- Parts manufactured in hardox 500
- Oil grease lubricated mechanical shaft seals
- 1 set of mating flanges in the pump inlet and outlet
- Parts manufactured in mild steel are delivered sand blasted and epoxy painted.
- Parts manufactured in stainless steel are sand blasted

Capacity: Up to 50m³/hr

Mavitec strongly recommends the use of a frequency converter.

MAVITEC

Lamella Pump

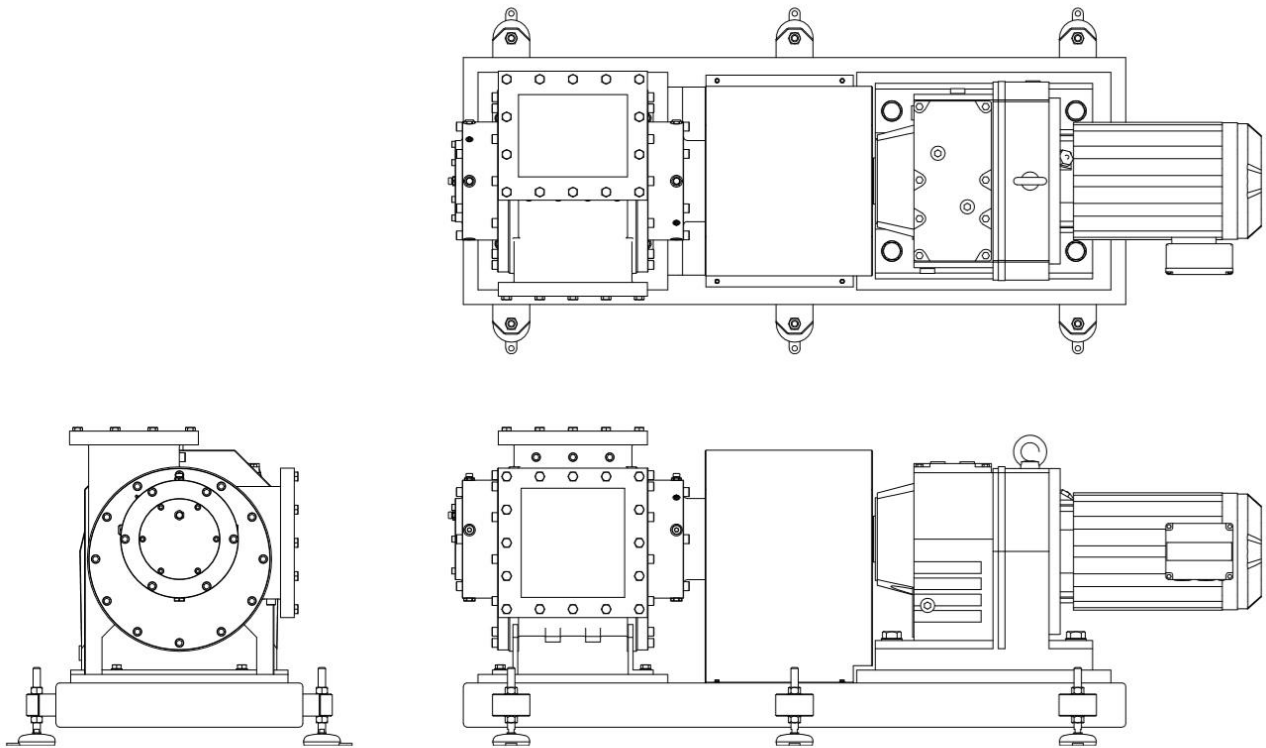

Model	Length (mm)	Total height (mm)	Centre height (mm)
250/70	670	500	304
350/90	860	640	367

Due to ongoing product improvements, data shown here is subject to change without notice.
Contact Mavitec B.V. for latest specifications.

MAVITEC

Galileistraat 32, 1704 SE Heerhugowaard, The Netherlands
Tel.: +31 (0)72 574 59 88
E-mail: info@mavitec.com - www.mavitec.com